







UT650EG/UT650EIG
UT850EG/UT850EIG



ENERGY-SAVING TOWER UPS



The energy-saving technology saves up to 93% of UPS power consumption

Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.


SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LED Status Indicator
- Overload Protection
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- High-speed Ethernet Data Transmission
- USB Connectivity Port*
- PowerPanel Management Software*
- Configurable Alarm
- EMI and RFI Filtration

*Selected Model(s)

PRODUCT CALLOUTS

1. Power On/Off Switch
2. LED Status Indicators
3. USB Port
4. Battery Backup & Surge Protected Outlets
5. AC Input Power Cord
6. Input Fuse
7. Communication Protection Ports RJ11/RJ45

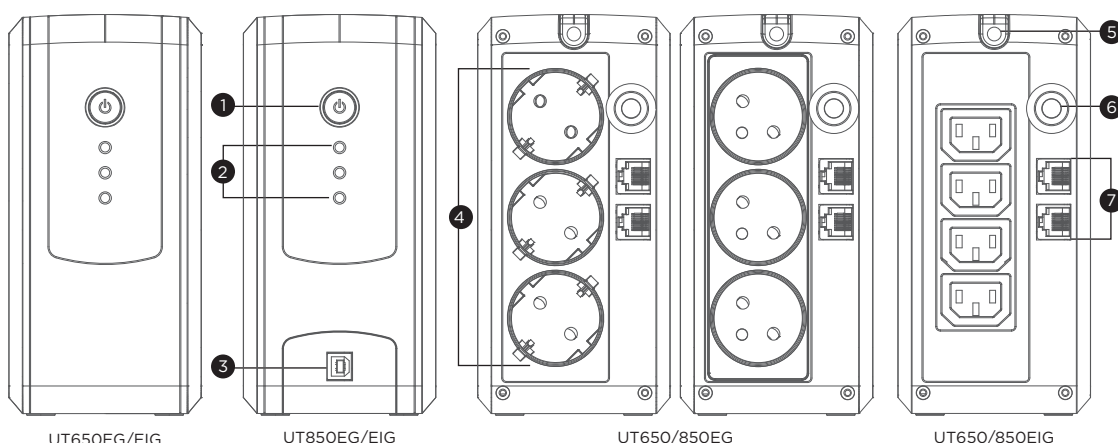

UT650EG/EIG

UT850EG/EIG

UT650/850EG

UT650/850EIG



TECHNICAL SPECIFICATIONS

Model Name	UT650EG		UT650EIG		UT850EG		UT850EIG	
General								
UPS Topology	Line-interactive							
Energy Saving Technology	GreenPower UPS™ Bypass Technology							
Input								
Generator Compatibility	Yes							
Nominal Input Voltage (Vac)	230 ± 10%							
Input Voltage Range (Vac)	165 - 290							
Input Frequency (Hz)	50 ± 5, 60 ± 5							
Input Frequency Detection	Auto-sensing							
Rated Input Current (A)	2.83				3.69			
Input Connector Type	Schuko		UK		Schuko		UK	
Output								
Capacity (VA)	650				850			
Capacity (Watts)	360				425			
On Battery Waveform	Simulated Sine Wave							
On Battery Voltage(s) (Vac)	230 ± 10%							
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%							
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck							
Overload Protection	Internal Current Limiting, Fuse							
Outlet(s) - Total	3		4		3		4	
Outlet Type	Schuko x 3 or FR x 3		IEC C13 x 4		Schuko x 3 or FR x 3		IEC C13 x 4	
Outlet(s) - Battery & Surge Protected	3		4		3		4	
Typical Transfer Time (ms)	4							
Battery								
Runtime at 60W (min)	28				30			
Runtime at 90W (min)	16				20			
Typical Recharge Time (Hours)	6							
User-replaceable	No							
Battery Type	Sealed Lead-acid							
Surge Protection & Filtering								
Surge Suppression (Joules)	150							
EMI/RFI Filtration	Yes							
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out							
Management & Communications								
LED Indicators	Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault							
HID Compliant USB Port(s)	-				1			
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault							
Ethernet Data Transmission Speed	Up to 1Gbps							
Power Management Software	-				PowerPanel Personal (Recommended)			
Physical								
Form Factor	Tower							
Physical Size - UPS Module								
Dimensions (WxHxD) (mm.)	84 x 174 x 280							
Weight (kg.)	3.8				4.2			
Environmental								
Operating Temperature (°C)	0 - 40							
Operating Relative Humidity (Non-condensing) (%)	0 - 90							
Online Thermal Dissipation (BTU/hr)	34							
Certifications								
Certifications*	CE							
RoHS	Yes							

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.