

PDU15B8R/PDU15B10R
PDU15B12R/PDU20B10R

ENTRY-LEVEL POWER DISTRIBUTION

Provides reliable power distribution for connected equipment


Ideal for server room and IT applications, the Basic PDU Series is a power distribution device that delivers electricity from a single source to multiple devices. The products can work under high temperature, and also feature overload protection, external site ground pin, industrial-grade metal housing, adjustable mounting brackets, long input power cord, cord retention tray and IEC receptacle locking.

SERIES FEATURES


- Overload Protection
- Industrial-grade Metal Housing
- Adjustable Mounting Brackets
- Cord Retention Tray

PRODUCT CALLOUTS


- 1 . Output Circuit Breaker
- 2 . AC Outlets
- 3 . External Site Ground
- 4 . AC Power Cord
- 5 . Cord Retention Tray Screw Holes

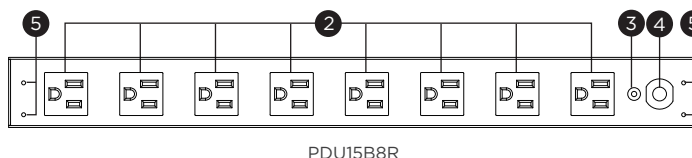


PDU15B8R



PDU15B10R



PDU15B12R

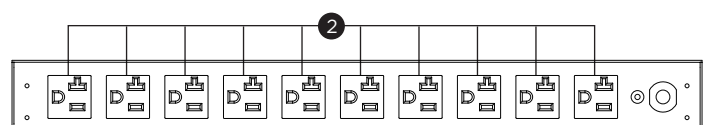

PDU20B10R



TECHNICAL SPECIFICATIONS

| Model Name | PDU15B8R | PDU15B10R | PDU15B12R | PDU20B10R |
|--|-------------------|-----------------|-----------------|-------------------|
| Input | | | | |
| Nominal Input Voltage (Vac) | 100 - 120 | | | |
| Input Frequency (Hz) | 50 / 60 | | | |
| Maximum Input Current (A) | 12(UL) | | | 16(UL) |
| Input Connector Type | NEMA 5-15P x 1 | | | NEMA 5-20P x 1 |
| Power Cord Length (m.) | 4.5 | | | |
| Output | | | | |
| Over Current Protection (Each Bank) (A) | 15 | | | 20 |
| Outlet(s) - Total | 8 | 10 | 12 | 10 |
| Outlet(s) - Rear | 8 | 10 | 12 | 10 |
| Outlet Type | NEMA 5-15R x 8 | NEMA 5-15R x 10 | NEMA 5-15R x 12 | NEMA 5-20R x 10 |
| Physical | | | | |
| Installed Rack Height (U) | 1 | | | |
| Cord Retention Tray | Yes | | | |
| Physical Size | | | | |
| Dimensions (WxHxD) (mm.) | 445 x 44.5 x 38.1 | | | 445 x 44.5 x 38.1 |
| Weight (kg.) | 2 | 2.01 | | 2.3 |
| Environmental | | | | |
| Operating Temperature (°C) | 0 - 50 | | | |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 95 | | | |
| Certifications | | | | |
| Certifications* | UL60950, UL62368 | | | |
| RoHS | Yes | | | |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.